

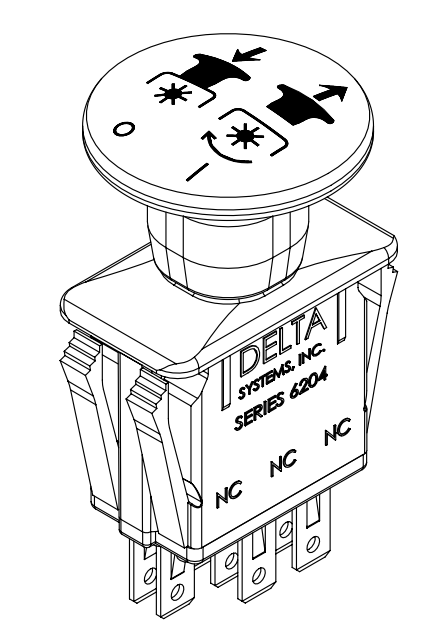
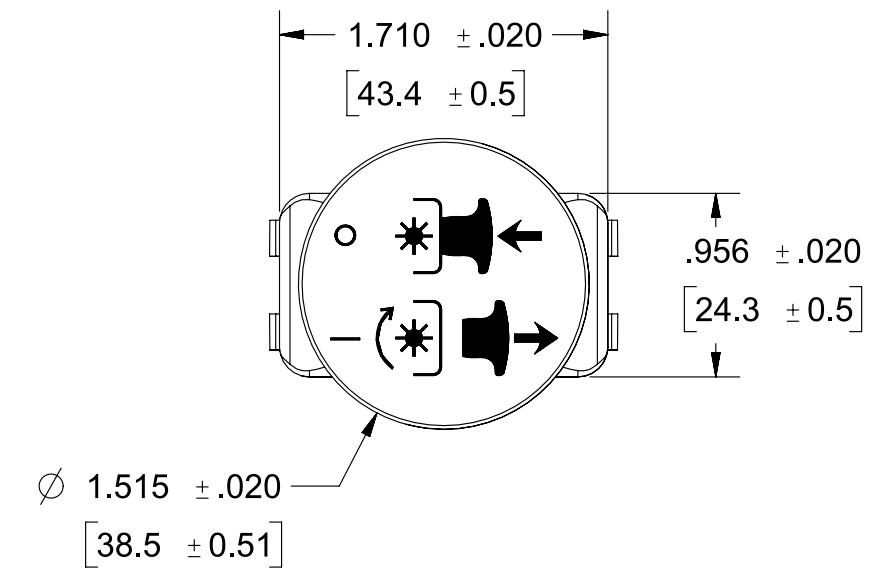
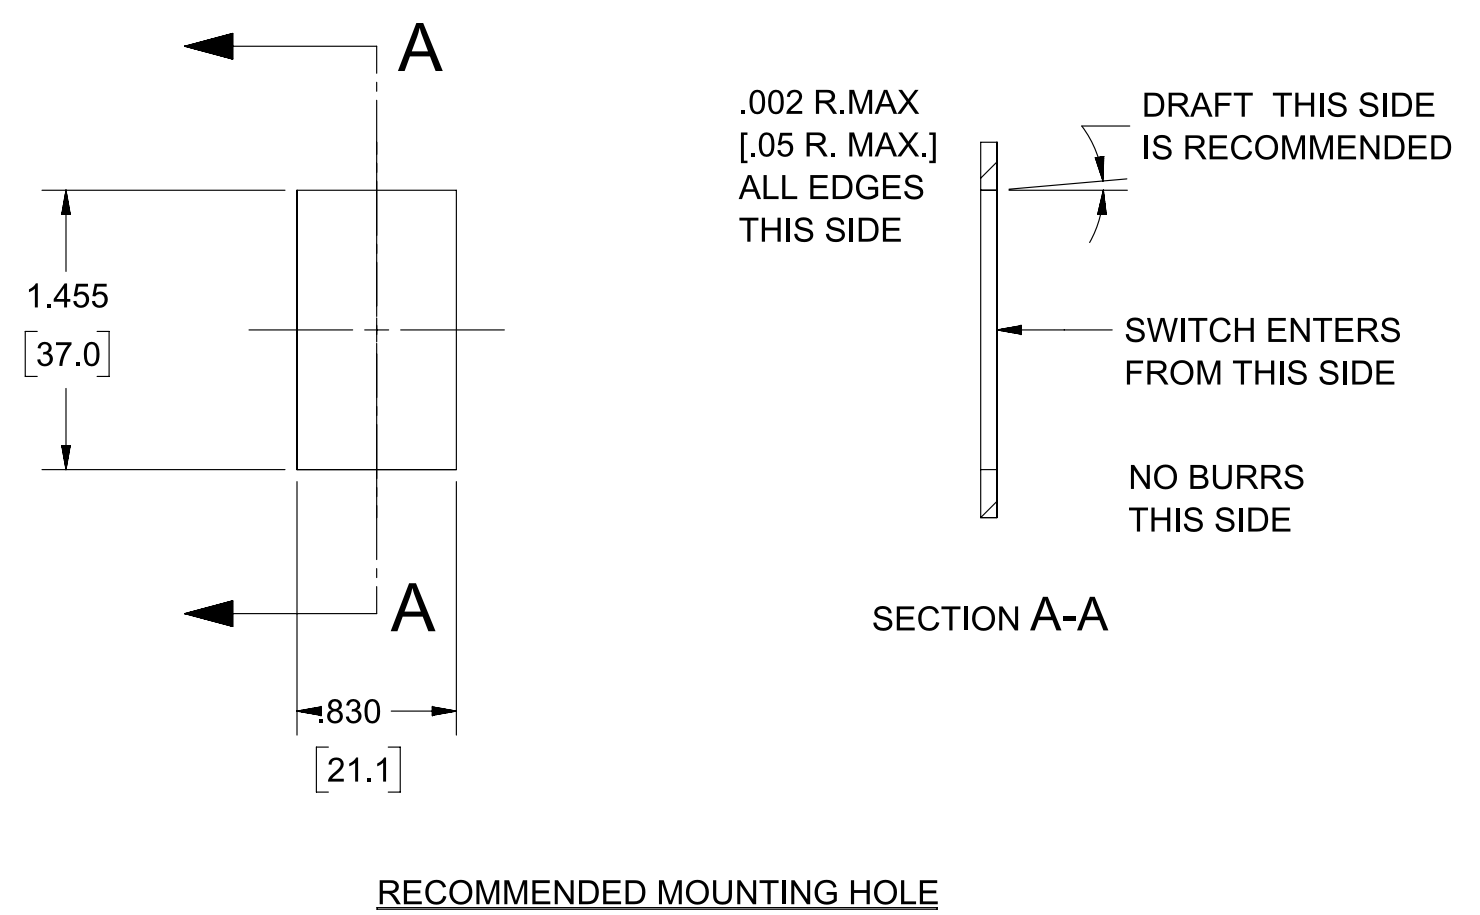
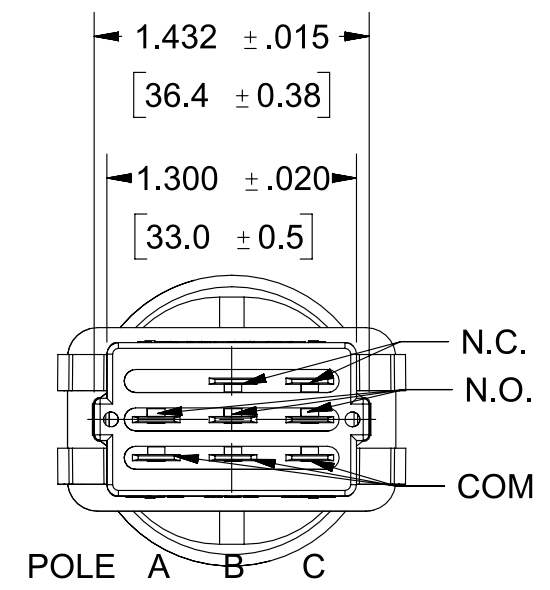


| REVISIONS |                 |          |      |
|-----------|-----------------|----------|------|
| REV.      | DESCRIPTION     | DATE     | INIT |
| 0         | INITIAL RELEASE | 08/12/15 | MJS  |
|           |                 |          |      |
|           |                 |          |      |

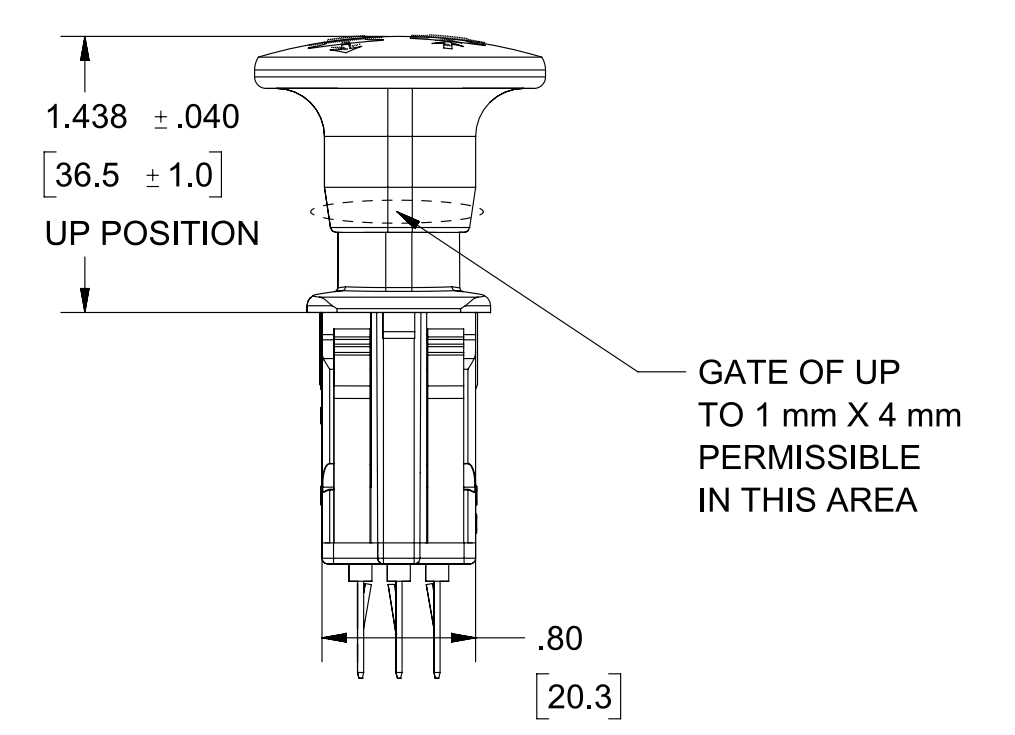

SNAP WINGS TO ACCOMMODATE  
SPECIFIC PANEL THICKNESSES OF;  
.055 [1.4] MAX. (WITH #972301 RETAINER RING)  
.085 [2.2] MAX. (WITH #972301 RETAINER RING)  
.105 [2.7] MAX.  
.135 [3.4] MAX.  
.165 [4.2] MAX.  
(NOTE 12)

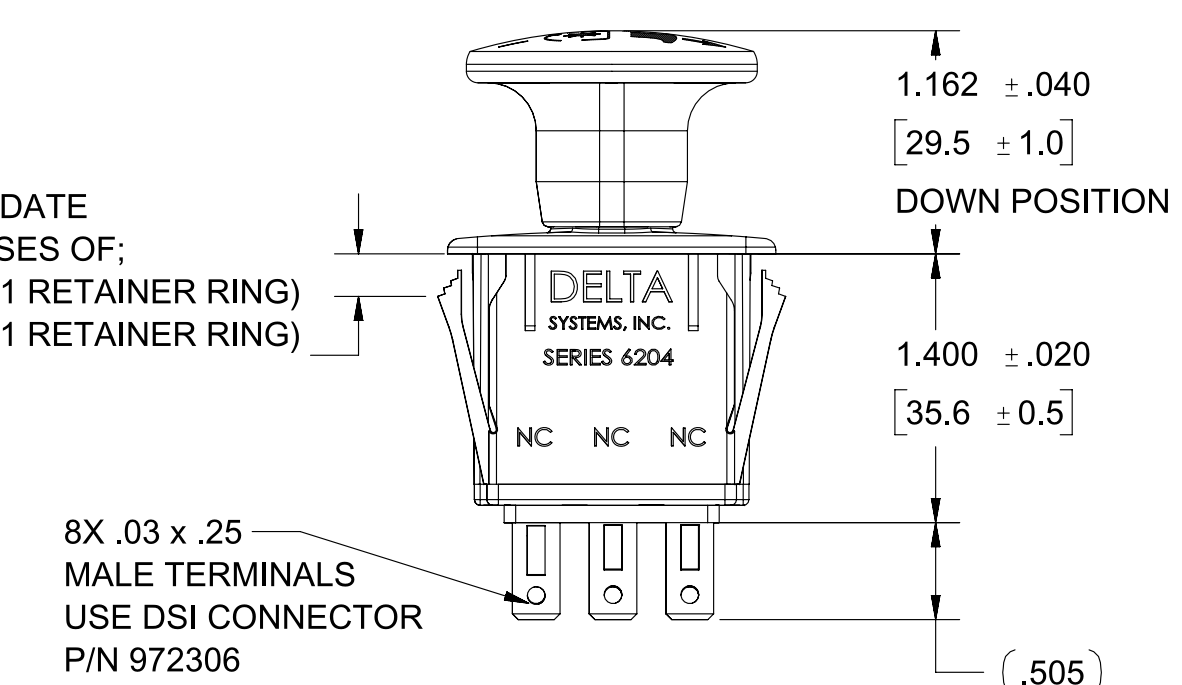

- NOTES
- 1) DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.
  - 2) PLASTIC PARTS ARE POLYPROPYLENE; TERMINALS ARE NICKEL OR TIN PLATED BRASS.
  - 3) SWITCH MUST RESIST 40# FORCE WITHOUT PULLING OUT OF PANEL OR DAMAGING SWITCH.
  - 4) KNOB COLOR IS YELLOW, KNOB GRAPHIC COLOR IS BLACK.
  - 5) COLOR OF ALL OTHER COMPONENTS ARE BLACK.
  - 6) BEZEL SURFACE TEXTURED TO MOLD TECH TEXTURE STANDARD MT1055-5.
  - 7) ON (UP) FORCE IS 11.00 ± 3.50 LBS.  
OFF (DOWN) FORCE IS 8.50 ± 2.00 LBS.
  - 8) OPERATING FORCES ARE MEASURED AFTER 10 (TEN) CYCLES.
  - 9) DATE CODE INDICATING YEAR, MONTH, & DAY OF MONTH MANUFACTURED APPLIED TO HOUSING.
  - 10) SWITCH FUNCTIONALITY TESTED AFTER ASSEMBLY.
  - 11) AVERAGE ELECTRICAL LIFE IS 40,000 CYCLES WITH A 5A INDUCTIVE LOAD @ 13 VDC
  - 12) THICKNESS INCLUDES PAINT AND/OR ANY OTHER LAYERS APPLIED BETWEEN SWITCH & PANEL.
  - 13) INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5-2009
  - 14) MUST BE IN COMPLIANCE WITH DIRECTIVE 2011/65/EU OF THE EUROPEAN PARLIAMENT AND THE COUNCIL OF 8 JUNE 2011 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (ROHS DIRECTIVE)

|  |   |                      |                        |   |
|--|---|----------------------|------------------------|---|
| PROPRIETARY & CONFIDENTIAL<br>THE INFORMATION CONTAINED IN<br>THIS DRAWING IS THE SOLE<br>PROPERTY OF DELTA SYSTEMS.<br>ANY REPRODUCTION IN PART OR<br>AS A WHOLE WITHOUT THE<br>WRITTEN PERMISSION OF DELTA<br>SYSTEMS IS PROHIBITED. | UNLESS OTHERWISE<br>SPECIFIED DIMENSIONS<br>ARE IN INCHES<br>TOLERANCES ARE:<br>.X ± .1<br>.XX ± .02<br>.XXX ± .005<br>X° ± 1 | DRAWN<br>mschwenning | DATE<br>12-Aug-2015    | 1734 FROST ROAD<br>STREETSBORO, OHIO 44241<br>330-626-2811<br>WWW.DELTASYSTEMSINC.COM |
|  |   | CHECKED<br>pcolonna  | DATE<br>17-Aug-2015    |   |
| DELTA SYSTEMS INC. DOES NOT<br>ASSUME ANY LIABILITY ARISING<br>OUT OF THE MISAPPLICATION OF<br>ANY PRODUCT   | COMPUTER GENERATED<br>DRAWING - NO MANUAL<br>CHANGES ALLOWED  | APPROVED<br>ikirbaw  | DATE<br>19-Aug-2015    | TITLE<br>PTO Switch Assembly APP  |
|  |   | MATERIAL<br>AS NOTED | FINISH<br>AS NOTED     | PROJECTED VIEWS<br>ARE 3RD ANGLE  |
| DO NOT SCALE DRAWING   |   | STATUS<br>DS4_Design | SCALE<br>NTS           | DWG. NO.<br>6204-315_APP  |
|  |   | SHEET<br>1 OF 1      | PROJECT NO.<br>EX0148G | REVISION<br>0   |