


8 7 6 5 4 3 2 1


REVISIONS

REV.	DESCRIPTION	DATE	INIT
0	INITIAL RELEASE	09/30/14	MJS

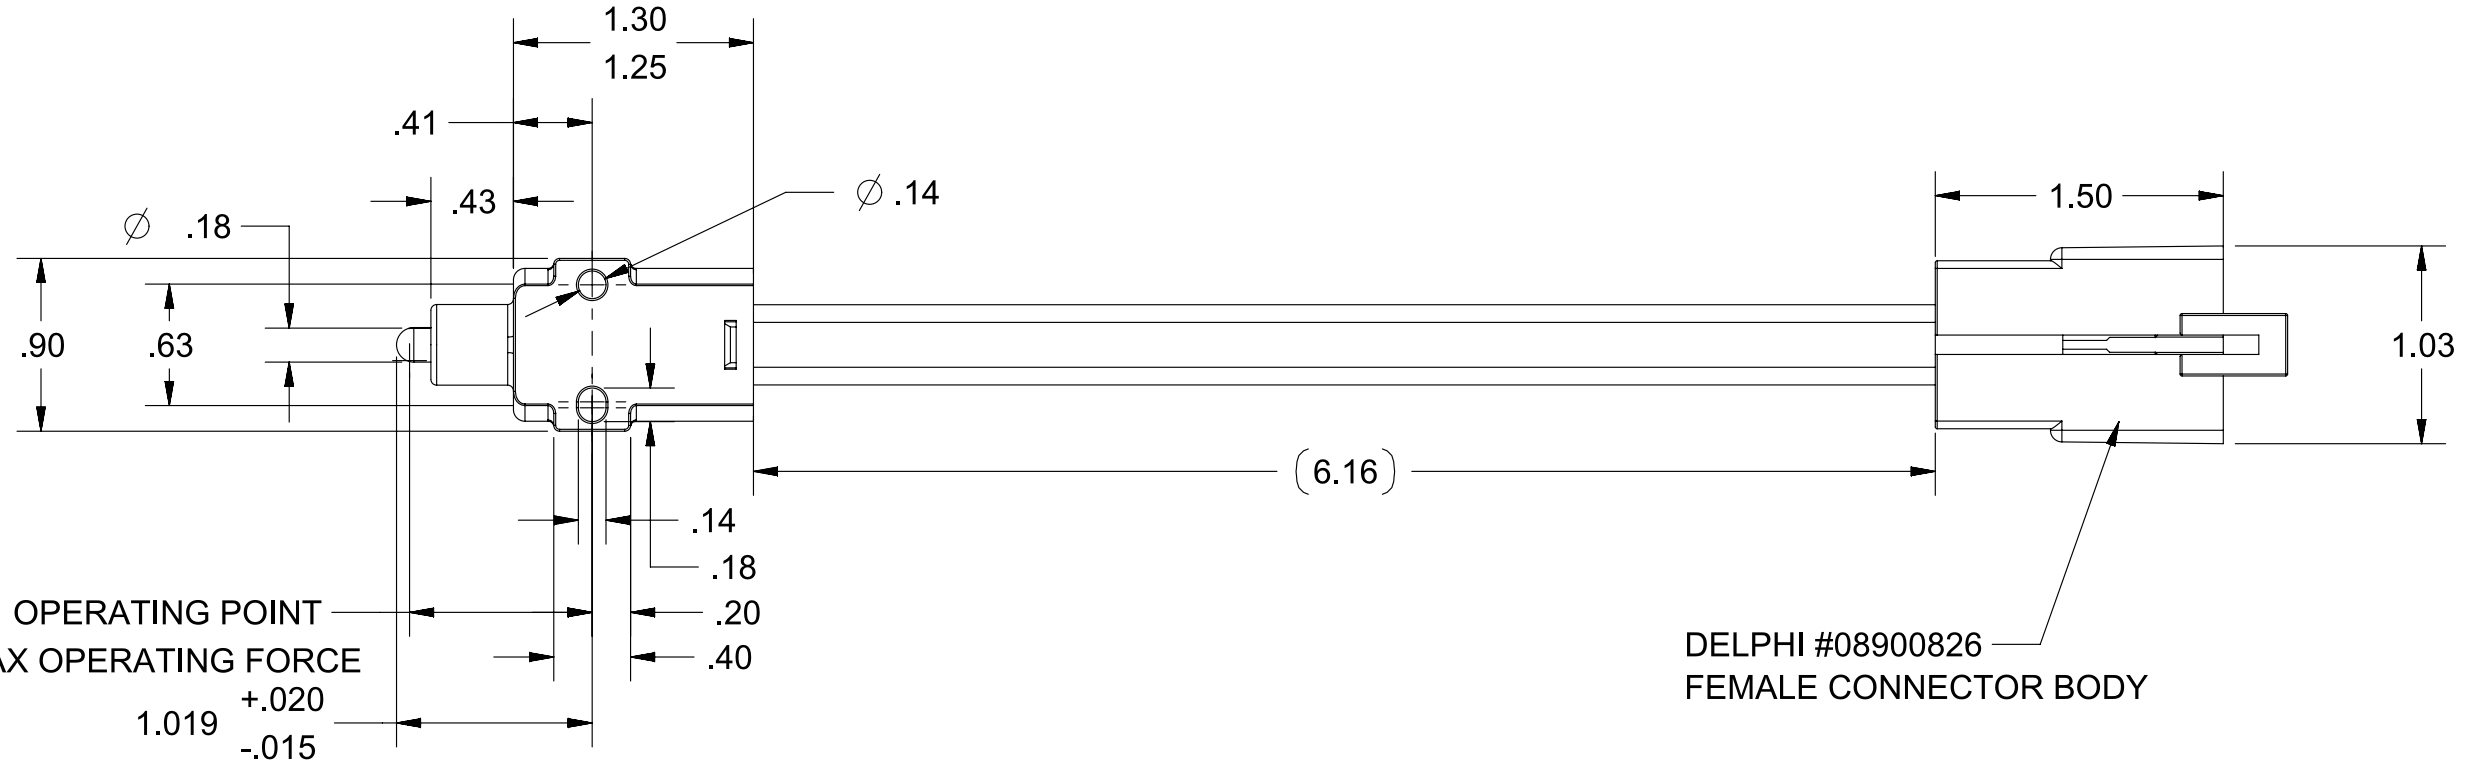

DELPHI #08900826
FEMALE CONNECTOR BODY

1.00 - .90 OPERATING POINT
2.5 LB MAX OPERATING FORCE
1.019 +.020
-.015

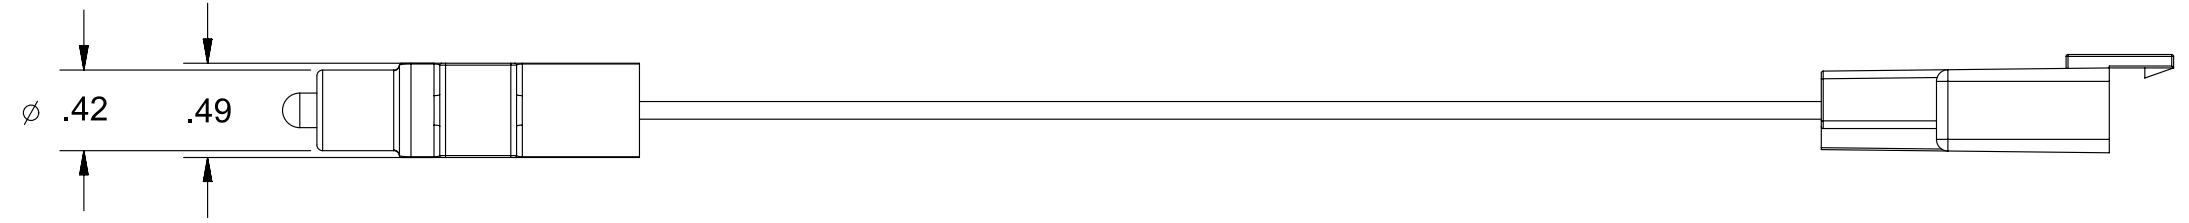

- NOTES:**
- 1) INITIAL VOLTAGE DROP MEASURED ACROSS TERMINALS IS 100 mV MAX MAX AT 3 AMPS WITH 12-14 VDC APPLIED
 - 2) SWITCH CIRCUIT WHEN OPEN WILL WITHSTAND 500 VDC WITH A MAX OF 5 mA LEAKAGE (100K OHMS/MIN).
 - 3) THE SWITCH AND LEADS WILL MEET AN INGRESS PROTECTION RATING OF IP65
 - 4) SWITCH HOUSING AND PLUNGER ARE CONSTRUCTED OF UV STABILIZED ACETAL COPOLYMER WITH 12% GLASS
COLOR: BLACK
 - 5) ELECTRICAL RATING: 250 MILLIAMPS @ 12-14 VDC
LIFE = 100,000 CYCLES INDUCTIVE
 - 6) INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5-2009

PROPRIETARY & CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DELTA SYSTEMS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DELTA SYSTEMS IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: .X± .1 .XX± .02 .XXX± .005 X°± 1°	DRAWN mschwenning	DATE 30-Sep-2014	1734 FROST ROAD STREETSBORO, OHIO 44241 330-626-2811 WWW.DELTASYSTEMSINC.COM						
		CHECKED bkirkman	DATE 18-Dec-2014							
APPROVED ikirbawy	DATE 22-Jun-2015	MATERIAL SEE NOTES	PROJECTED VIEWS ARE 3RD ANGLE 		TITLE Walker Universal Switch N.C. Application					
DELTA SYSTEMS INC. DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE MISAPPLICATION OF ANY PRODUCT	COMPUTER GENERATED DRAWING - NO MANUAL CHANGES ALLOWED	FINISH SEE NOTES	DO NOT SCALE DRAWING	STATUS DS4_Design	SIZE B	DWG. NO. 7081-47_APP	SCALE NTS	SHEET 1 OF 1	PROJECT NO. EX0257	REVISION 0

8 7 6 5 4 3 2 1